

Porto Santo Gris Mosaic is a rectified ceramic wall covering with a matte finish. Its distinctive multi-faceted design incorporates various shapes and geometric patterns, making it an ideal choice for decorative applications in kitchens, restaurants, and bathrooms. With dimensions of 8"X8", it is suitable for both interior and exterior use, catering to both residential and commercial projects.




WOODSTONE

MR CES Porto Santo Gray 8" x 8"

Composition: Ceramic

12 pieces per box / 5.3 SF per Box

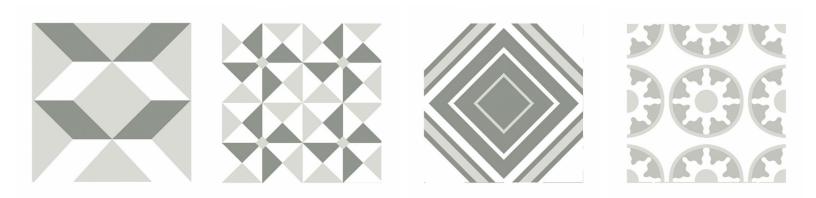



Ficha Técnica Technical Information Piso y Muro Gres / Floor & Wall Tile

Link: Pasta blanca vs. Pasta Roja



Formato / Size: 17.8 x 17.8 cm Rectificado / 7" x 7" Rectified

26 FACES PEI	TTM/D	EATIEOCM	EXTERIOR
--------------	-------	----------	----------

mm	Espesor / Thickness	9 mm
\gtrsim	Separación de boquilla / Grout separation	2 mm
PEI	P.E.I.	3 (Tráfico
10	Tono y Textura Mezclado / Mixed Tone and Texture	Diverso /

mm			
\approx	Separación de boquilla / Grout separation	2 mm	
PEI	P.E.I.	3 (Tráfico: Medio)	
	Tono y Textura Mezclado / Mixed Tone and Texture	Diverso / Diverse	
<i>.</i> ,	Resistencia al ataque químico / Chemical Resistance	Conforme / In compliance with	A.S.T.M. C650
*	Coeficiente Dinámico de Fricción / DCOF	≥ 0.42 %	A.S.T.M. C1028
	Absorción de agua / Water absortion	3 - 6 %	A.S.T.M. C373
<u> </u>	MOHS	5-8	A.S.T.M. C1028
÷	Resistencia a la flexión / Breaking Strength	≥ 250kg / 551 lbs	ISO 10545-4
	Resistencia al shock térmico / Resistance to thermal shock	Conforme / In compliance with	A.S.T.M. C484
₩	Resistencia a helada / Resistance to frost	Conforme / In compliance with	A.S.T.M. C1026
*	Resistencia a las manchas / Resistance to staining	Conforme / In compliance with	A.S.T.M. C1378
e®	Resistencia a la abrasión / Resistance to abrasion	Conforme / In compliance with	ANSI A137

